



Estilo



General purpose decorative strip type fixture with coloured end caps, suitable for single T8 / T12 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)



Specification

Housing

Made up of CRCA sheet steel with decorative coloured ABS lamp holding end plates.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with 230V rated domestic low loss open construction copper wound ferromagnetic ballast and universal starter (FSU) upto terminal block, for ready to use.

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDF22104009 | 1x36/40W FTL | 230 | 0.410 | G13 | ≥0.50 |




Super Strip



General purpose strip type fixture suitable for single T8 / T12 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

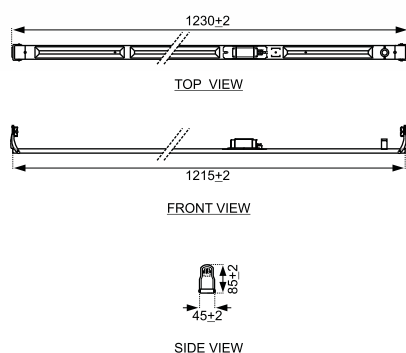

Specification

Housing

Made up of CRCA sheet steel with decorative ABS lamp holding end plates.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with 230V rated domestic low loss open construction copper wound ferromagnetic ballast and universal starter (FSU) upto terminal block, for ready to use.

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDF02104009 | 1x36/40W FTL | 230 | 0.410 | G13 | ≥0.50 |




Dreamlite



Decorative sleek indoor use luminaire designed to match profile of only 36W (T8) linear fluorescent lamp.

Dimensions (in mm)

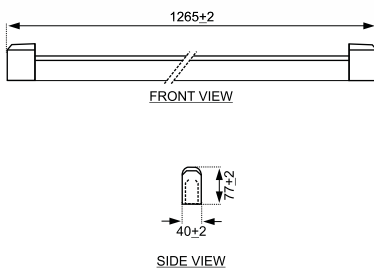

Specification

Housing

Made up of CRCA sheet steel with a compact-profile to suit T8 36W lamp.

End caps

ABS contoured perfectly to match T8 lamp profile for better aesthetic.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp Holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with 230V rated domestic low loss open construction copper wound ferromagnetic ballast and universal starter (FSU) upto terminal block and packed in attractive gift box.

Luminaire is not suitable for 40W FTL (T12 : $\phi 38\text{mm}$) due to higher tube diameter.

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws.


Applications

Staircases
Residences
Small offices
Society parking areas



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-----------|-----------------------|---------------------|-------------|--------------|
| LHDF21104009 | 1x36W FTL | 230 | 0.410 | G13 | ≥ 0.50 |




Rayzor



Decorative indoor use luminaire designed to match profile of only 40W (T12) linear fluorescent lamp.

Dimensions (in mm)

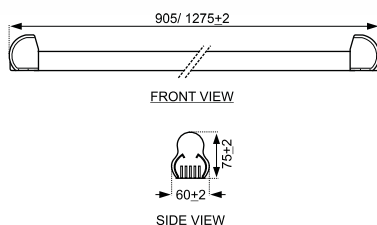

Specification

Housing

Made up of CRCA sheet steel with decorative end profile caps.

End caps

ABS contoured perfectly to match 40W T12 lamp profile for better aesthetic.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp Holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with 230V rated domestic low loss open construction copper wound ferromagnetic ballast and universal starter (FSU) upto terminal block and packed in attractive gift box.

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDF31104009 | 1x36/40W FTL | 230 | 0.410 | G13 | ≥0.50 |




Wallbrite




Decorative indoor use luminaire with acrylic diffuser suitable for twin 9W (PL-S) compact fluorescent lamps for soft light ambience.

Dimensions (in mm)



FRONT VIEW



SIDE VIEW

Specification

Housing

Made up of CRCA sheet steel.

Diffuser

Textured methacrylate formed sheet.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

White polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with twin 240V rated 9/11W CFL open construction copper wound ferromagnetic ballasts upto terminal block.

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas
Shops & establishments



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-----------------|-----------------------|---------------------|-------------|--------------|
| LHDC01209017 | 2x9W CFL (PL-S) | 240 | 0.300 | G23 | ≥0.50 |




Liliput Electra



Decorative compact luminaire suitable for 36W compact fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

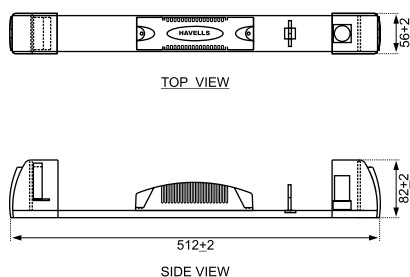

Specification

Housing

Made up of CRCA sheet steel with self styled ABS ballast cover.

End caps

White coloured ABS plastic.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

White polycarbonate/ ABS with electrical grade brass contacts.

Electric gear


Pre-wired with 230V rated with high frequency electronic ballast upto terminal block, packed in attractive gift box. Low voltage pick-up (145V)

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas
Shops & establishments

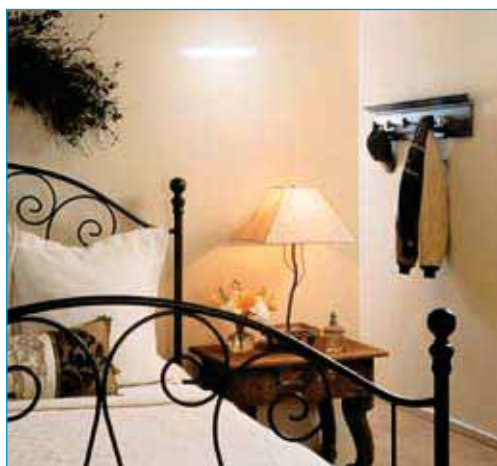

Technical Details

| Ordering Code** | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor* |
|-----------------|------------|-----------------------|---------------------|-------------|---------------|
| LHDC15136025 | 1x36W FP-L | 230 | 0.390 | 2G11 | ≥0.60 |

* With "Olympian" high frequency electronic ballast PF >0.90

** Without Lamp

*** Liliput Electra Plus is supplied with 36W FPL




Electra



General purpose decorative strip type fixture with coloured end caps, domestic electronic ballast suitable for single T8/ T12 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

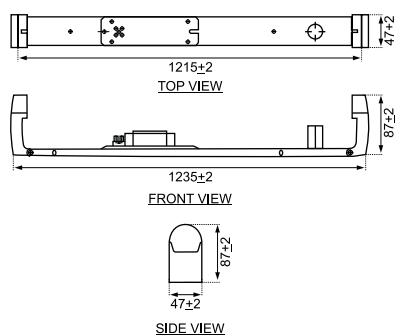

Specification

Housing

Made up of CRCA sheet steel with decorative ABS lamp holding end plates.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear


Pre-wired with 230V rated domestic electronic ballast upto terminal block, for ready to use. Low voltage pick-up (145V).
Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas

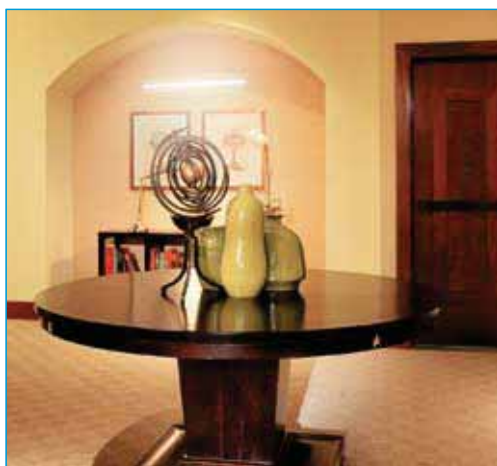

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDF13104025 | 1x36/40W FTL | 230 | 0.260 | G13 | ≥0.55 |




Electra Slim



General purpose sleek and decorative strip type fixture with coloured end caps, electronic ballast suitable for single T8 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

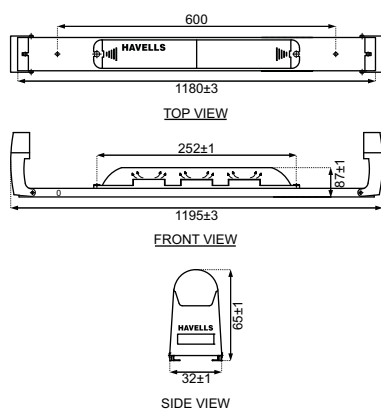

Specification

Housing

Made up of CRCA sheet steel with decorative ABS lamp holding end plates.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with 230V rated electronic ballast upto terminal block, for ready to use. Low voltage pick-up (145V).
Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Society parking areas



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-----------|-----------------------|---------------------|-------------|--------------|
| LHDF14104025 | 1x36W FTL | 230 | 0.260 | G13 | ≥0.60 |




Eurostrip



General purpose sleek and decorative strip type fixture with coloured end caps, electronic ballast suitable for single T5 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

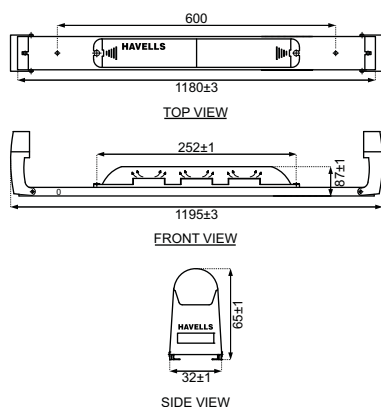

Specification

Housing

Made up of CRCA sheet steel with decorative ABS lamp holding end plates.

Finish

Epoxy powder coated white after phosphochromate treatment for rust free long life.

Lamp holders

Push fit type white polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with 230V rated electronic ballast upto terminal block, for ready to use. Low voltage pick-up (145V).

Mounting

Fixed on wall/ ceiling with help of screws.

Applications

Staircases
Residences
Small offices
Cove lighting
Society parking areas



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDT14128032 | 1x28W T5 FTL | 230 | 0.230 | G5 | ≥0.60 |




Rover Classic



Decorative shock proof slim extruded fixture with domestic electronic ballast suitable for only single 18W/ 36W FTL linear fluorescent lamp for domestic/ indoor application only.


Dimensions (in mm)



FRONT VIEW



SIDE VIEW



FRONT VIEW



SIDE VIEW

Specification

Channel

Made up of Extruded PVC section.

End caps

Made of high grade ABS countered perfectly to match 18W/ 36W T8 lamp profile.

Finish

White matt finish.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block for ready to use & packed in attractive gift box.
Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of snap-on installers provided.


Applications

Residences
Small offices
Reception areas
Hospital premises
Conference rooms



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-----------|-----------------------|---------------------|-------------|--------------|
| LHDF17118024 | 1x18W FTL | 230 | 0.145 | G13 | ≥0.55 |
| LHDF17136025 | 1x36W FTL | 230 | 0.275 | G13 | ≥0.55 |




Rover New Popular



Decorative slim extruded Al box fixture with domestic electronic ballast suitable for only single 18W/ 36W FTL linear fluorescent lamp for domestic/ indoor application only.


Dimensions (in mm)



FRONT VIEW



SIDE VIEW



FRONT VIEW



SIDE VIEW

Specification

Channel

Made up of Extruded Al. section.

End caps

Made of high grade ABS countered perfectly to match 18W/ 36W T8 lamp profile.

Finish

Epoxy powder coated white matt finish after phosphochromate treatment.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block for ready to use & packed in attractive gift box.
Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws provided.

Applications

Residences
Small offices
Reception areas
Hospital premises
Conference rooms



Technical Details


| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-----------|-----------------------|---------------------|-------------|--------------|
| LHDF07118024 | 1x18W FTL | 230 | 0.145 | G13 | ≥0.55 |
| LHDF07136025 | 1x36W FTL | 230 | 0.275 | G13 | ≥0.55 |



Rover New

Decorative slim extruded Al box fixture with German diffuser, domestic electronic ballast suitable for only single 18W/ 36W FTL linear fluorescent lamp for domestic/ indoor application only.


Dimensions (in mm)



FRONT VIEW



SIDE VIEW



FRONT VIEW



SIDE VIEW

Specification

Channel

Made up of Extruded Al. section.

End caps

Made of high grade ABS countered perfectly to match 18W/ 36W T8 lamp profile.

Diffuser

Methacrylate, prismatic German diffuser for glare and flicker free light.

Finish

Epoxy powder coated white matt finish after phosphochromate treatment.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block for ready to use & packed in attractive gift box.

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws provided.

Applications

Residences
Small offices
Reception areas
Hospital premises
Conference rooms

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-----------|-----------------------|---------------------|-------------|--------------|
| LHDF06118024 | 1x18W FTL | 230 | 0.145 | G13 | ≥0.55 |
| LHDF06136025 | 1x36W FTL | 230 | 0.275 | G13 | ≥0.55 |




E-Lite Deluxe



Decorative ultra slim Extruded Al. box fixture with German diffuser, domestic electronic ballast suitable for single 28W T5 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

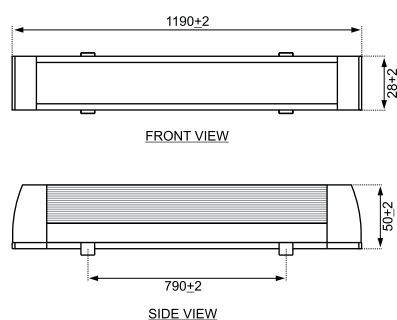

Specification

Channel

Made up of Extruded Al. section.

End caps

Made of high grade ABS.

Diffuser

Methacrylate, prismatic German diffuser for glare free light.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block, for ready to use & packed in gift box pre-fitted with lamp. Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of snap-on installers provided.


Applications

Residences
Clean rooms
Cove lighting
Hospital premises
Conference rooms



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDT10128032 | 1x28W T5 FTL | 230 | 0.230 | G5 | ≥0.55 |



E-Lite New



Decorative ultra slim box fixture with German diffuser, domestic electronic ballast suitable for single 8W/ 14W / 28W T5 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

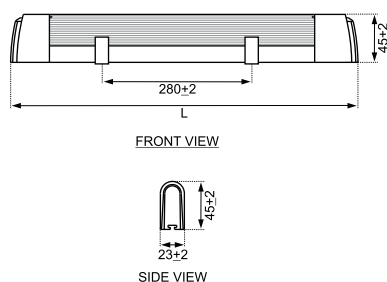


Table -1 : Dimensional Details

| Lamp Type | Length (L) |
|------------|------------|
| 8W T5 FTL | 342 |
| 14W T5 FTL | 602 |
| 28W T5 FTL | 1190 |

Specification

Channel

Made up of ultra slim fire retardent PVC.

End caps

Silver colour clip-on end caps provided as standard.

Diffuser

Methacrylate, prismatic German diffuser for glare free light.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block, for ready to use & packed in gift box pre-fitted with lamp. Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of snap-on installers provided.

Applications

Residences
Clean rooms
Cove lighting
Hospital premises
Conference rooms



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDF08108031 | 1x8W T5 FTL | 230 | 0.070 | G5 | ≥0.55 |
| LHDF08114031 | 1x14W T5 FTL | 230 | 0.110 | G5 | ≥0.55 |
| LHDF08128032 | 1x28W T5 FTL | 230 | 0.230 | G5 | ≥0.55 |
| LHDF18128032 | 1x28W T5 FTL | 230 | 0.160 | G5 | ≥0.95 |




E-Lite New Popular



Decorative ultra slim box fixture with domestic electronic ballast suitable for single 28W T5 linear fluorescent lamp for domestic/ indoor application only.

Dimensions (in mm)

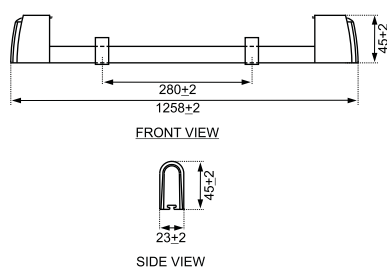

Specification

Channel

Made up of ultra slim fire retardent PVC.

End caps

Silver colour clip-on end caps provided as standard.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block, for ready to use & packed in gift box pre-fitted with lamp. Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of snap-on installers provided.

Applications

Residences
Clean rooms
Cove lighting
Hospital premises
Conference rooms



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--------------|-----------------------|---------------------|-------------|--------------|
| LHDT08128032 | 1x28W T5 FTL | 230 | 0.230 | G5 | ≥0.55 |
| LHDT18128032 | 1x28W T5 FTL | 230 | 0.160 | G5 | ≥0.95 |




Matrix




Decorative moulded body, square, wall/ ceiling mounted fixture with domestic electronic ballast suitable for single special 9W compact fluorescent lamp (w/ o internal starter).

Dimensions (in mm)



FRONT VIEW



SIDE VIEW

Specification

Housing

Made up of high grade ABS.

Diffuser

Poly-propylene translucent diffuser for glare free light.

Finish

Matt finish white matching ABS body.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block, for ready to use & packed in attractive gift box pre-fitted with lamp (6500K).

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws provided.

Applications

Residences
Staircases
Study rooms
Dressing rooms
Hospital premises
Corridors & lobbies



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--|-----------------------|---------------------|-------------|--------------|
| LHDC17109030 | 1x9W CFL (PL-S)* (w/o int. starter) | 230 | 0.090 | G23 | ≥0.55 |

*Ordering code for 9W 6500K lamp is PHCSC02209 & 9W 2700K lamp PHCSW02209.





Luna



Decorative moulded body, round, wall/ ceiling mounted fixture with domestic electronic ballast suitable for twin special 9W compact fluorescent lamps (w/o internal starter).

Dimensions (in mm)



Specification

Housing

Made up of high grade ABS.

Diffuser

Poly-propylene translucent diffuser for glare free light.

Finish

Matt finish white matching ABS body.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block, for ready to use & packed in attractive gift box pre-fitted with lamp (6500K).

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws provided.

Applications

Residences
Staircases
Study rooms
Dressing rooms
Hospital premises
Corridors & lobbies



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--|-----------------------|---------------------|-------------|--------------|
| LHDC27209024 | 2x9W CFL (PL-S)* (w/o int. starter) | 230 | 0.170 | G23 | ≥0.55 |

*Ordering code for 9W 6500K lamp is PHCSC02209 & 9W 2700K lamp PHCSW02209.




M9-Deluxe



Decorative bed lite fixture with domestic electronic ballast suitable for single special 9W compact fluorescent lamp (w/o internal starter)

Dimensions (in mm)

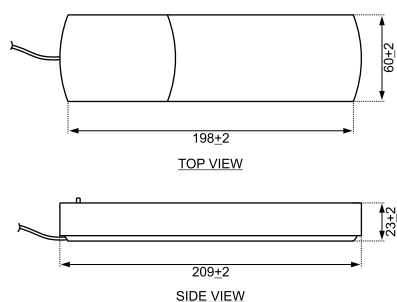

Specification

Housing

Made up of high grade ABS.

Diffuser

Poly-propylene translucent diffuser for glare free light.

Finish

Matt finish white matching ABS body.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency electronic ballast, upto terminal block. Packed in attractive gift box pre-fitted with replaceable lamp, ready to use.

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help of screws provided.

Applications

Bedrooms
Staircases
Study rooms
Bank counters
Dressing rooms
Hospital premises
Corridors & lobbies



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|--|-----------------------|---------------------|-------------|--------------|
| LHDC08109023 | 1x9W CFL (PL-S)* (w/o int. starter) | 230 | 0.090 | G23 | ≥0.55 |

*Ordering code for 9W 6500K lamp is PHCSC02209 & 9W 2700K lamp PHCSW02209.




Sparkle



Decorative extruded Al body with sliding diffuser fixture with domestic electronic ballast suitable for single/ twin 11W compact fluorescent lamp (s).

Dimensions (in mm)

Sparkle 1x11W

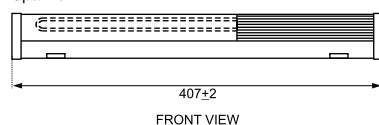


FRONT VIEW



SIDE VIEW

Sparkle 1x11W



FRONT VIEW



SIDE VIEW

Specification

Channel

Made up of Extruded Al. section with decorative plastic end caps.

Diffuser

Sliding translucent diffuser for glare free light.

Finish

Matt finish Al. cover after phosphochromate treatment.

Lamp holders

Push fit type white polycarbonate with phosphor bronze contacts.

Electric gear

Pre-wired with 230V rated high frequency NPF electronic ballast, upto terminal block, for ready to use & packed in attractive gift box pre-fitted with lamp(s) (6500K).

Not recommended for industrial 240V application.

Mounting

Fixed on wall/ ceiling with help snap-on installers provided.

Applications

Libraries
Staircases
Residences
Study tables
Study rooms
Bank counters
Dressing rooms
Corridors & lobbies

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|------------------------|-----------------------|---------------------|-------------|--------------|
| LHDC04111053 | 1x11W CFL (PL-S 4 PIN) | 230 | 0.076 | 2G7 | ≥0.55 |
| LHDC04211056 | 2x11W CFL (PL-S 4 PIN) | 230 | 0.156 | 2G7 | ≥0.55 |





Innova 111



Decorative energy efficient 18W spiral miniature fluorescent Lamp, domestic electronic ballast for low ceiling height application.

Dimensions (in mm)

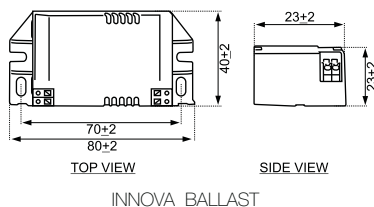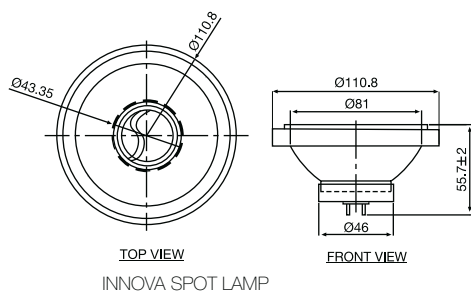

INNOMA FIXTURE

Specification

Compact Cool Spot Light

ABS base with ventilated openings ensures low temperatures. Anti-oxident coated high purity aluminium, encapsulate concentrated beam reflector gives consistent bright light output. Mini spiral, tri-phosphor coated lamp tube ensures better lumen, longer lamp life and higher CRI. Available in options 2700K & 6500K.

Electronic Ballast

Housing made up of ABS white case. Push fit type terminals for input supply and lamp connection. Lead wire with GU5.3 lamp holder.

Advantages

Saves energy upto 85%.
Very low heat generation.
Longer lamp life (≥8000 BH).
Distance between source & object not limited.
Ready to use complete set, attractively packed in blister pack with cutout template.

Mounting

Can be use with QR111/AR111 fixtures (Please order for fixture seperately).

Applications

Showrooms
Restaurants
Banquet halls
Conference rooms

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHOC33118364 | 1x18W MFL – 3K | 240 | 0.130 | GU5.3 | ≥0.60 |
| LHOC33118664 | 1x18W MFL – 6K | 240 | 0.130 | GU5.3 | ≥0.60 |




Innova Spotlight



Decorative energy efficient 7W/ 11W spotlight with spiral miniature fluorescent Lamp, domestic electronic ballast for low ceiling height application.

Dimensions (in mm)

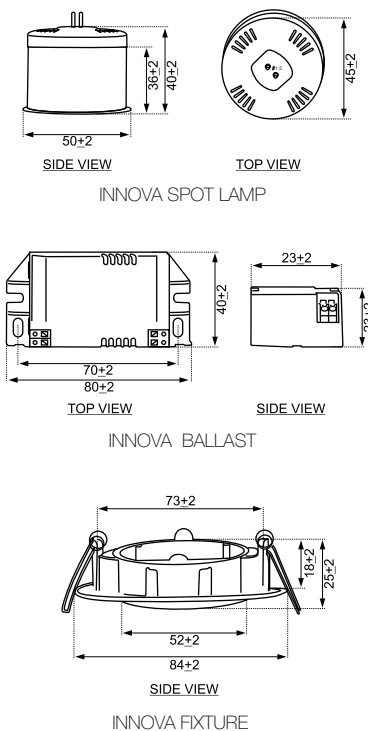

Specification

Compact Cool Spot Light

ABS base with ventilated openings ensures low temperatures. Anti-oxident coated high purity aluminium, encapsulate reflector gives consistent bright light output. Mini spiral, tri-phosphor coated lamp tube ensures better lumen, longer lamp life and higher CRI.. Available in options 2700K & 6500K.

Electronic Ballast

Housing made up of ABS white case. Push fit type terminals for input supply and lamp connection. Lead wire with GU5.3 lamp holder.

Fixture

Available in two colour options white & silver.

Advantages

Saves energy upto 85%.
Very low heat generation.
Longer lamp life(≥ 8000 BH).
Distance between source & object not limited.
Ready to use complete set, attractively packed in blister pack with cutout template.

Mounting

Fixed into false ceiling with help of twin quick fix SS spring clips. Use cut-out template from blister packaging.

Applications

Showrooms
Restaurants
Banquet halls
Conference rooms

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|--|----------------|-----------------------|---------------------|-------------|--------------|
| Innova 7W blister with Silver fixture LHOC43107664 | 1x7W MFL – 6K | 240 | 0.065 | GU5.3 | ≥ 0.60 |
| Innova 11W blister with White fixture LHOC44111664 | 1x11W MFL – 6K | 240 | 0.075 | GU5.3 | ≥ 0.60 |
| Innova 11W blister with Silver fixture LHOC45111664 | 1x11W MFL – 6K | 240 | 0.075 | GU5.3 | ≥ 0.60 |

*For fixture with 2700K lamp option change last three digits of ordering code to 364.




Innova 111 Grid



Decorative energy efficient 18W spotlight with spiral miniature fluorescent Lamp, domestic electronic ballast for low ceiling height application.

Dimensions (in mm)

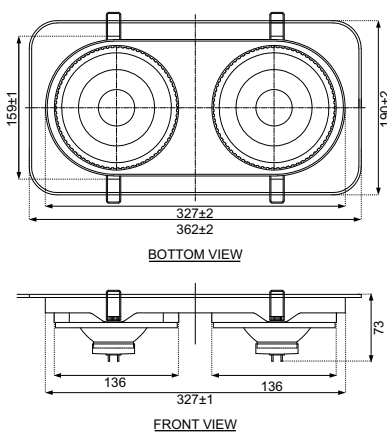

Specification

Compact Cool Spot Light

ABS housing with silver finished. Swivel option gives freedom to adjust the angle in any direction. Anti-oxident coated high purity aluminium, encapsulate reflector gives consistent bright light output. Mini spiral, tri-phosphor coated lamp tube ensures better lumen, longer lamp life, higher CRI and low temperatures.

Available in options 2700K & 6500K.

Electronic Ballast

Housing made up of ABS white case.

Push fit type terminals for input supply and lamp connection.

Lead wire with GU5.3 lamp holder.

Finish

Available in silver finish with frosted glass to reduce glare.

Advantages

Saves energy upto 85%.

Very low heat generation.

Longer lamp life(≥8000 BH).

Distance between source & object not limited.

Ready to use complete set, attractively packed with cutout template.

Mounting

Fixed into false ceiling with help of twin quick fix SS spring clips. Use cut-out template from packaging.

Applications

Showrooms

Restaurants

Banquet halls

Conference rooms

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|-----------------|-----------------------|---------------------|-------------|--------------|
| LHOC34118664 | 1x 18W MFL – 6K | 240 | 0.130 | GU5.3 | ≥0.60 |
| LHOC34218664 | 2x18W MFL – 6K | 240 | 0.260 | GU5.3 | ≥0.60 |

*For fixture with 2700K lamp option change last three digits of ordering code to 364.



Innova Downlighter



Decorative recess, compact, energy efficient downlighter with electronic ballast suitable for 15W/ 23W/ 45W spiral CFL lamp GU10 base.

Dimensions (in mm)

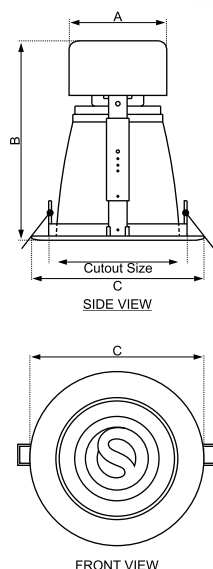


Table -1 : Dimensional Details

| Lamp Type | A | B | Cutout Size | C (φ) |
|-----------|-----|-----|-------------|-------|
| 15W CFL | 60 | 120 | 86 | 95 |
| 23W CFL | 70 | 145 | 108 | 124 |
| 45W CFL | 100 | 185 | 147 | 176 |

Tolerance: +/-2mm.

Specification

Housing

Made up of ABS white and reflector holding ring in ABS material in white finish.

Reflector

Reflector made up of high purity pre-anodised specular aluminium sheet.

Electric gear

Wired with high frequency integral electronic ballast with push-fit type mains terminals for input supply connection. Pre-fitted with replaceable spiral CFL (6500K) lamp as standard and packed in attractive gift box.

Use single strand wire or multi-strand wire with thimble for supply connection. Lamp option also available in 2700K.

Mounting

Fixed into false ceiling with help of twin quick fix SS spring clips as per instruction manual provided. Use cut-out template from blister packaging. Suitable for false ceiling thickness upto 14mm.

Applications

Showrooms
Small offices
Shopping malls
Residential areas
Passages & corridors

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHOC01115663 | 1x15W CFL – 6K | 240 | 0.062 | GU10 | ≥0.90 |
| LHOC01123663 | 1x23W CFL – 6K | 240 | 0.095 | GU10 | ≥0.90 |
| LHOC01145663 | 1x45W CFL – 6K | 240 | 0.205 | GU10 | ≥0.90 |

*For fixture with 2700K lamp option change last three digits of ordering code to 363.



Innova Downlighter-Swivel Type



Decorative recess, compact, swivel, energy efficient downlighter with electronic ballast suitable for 13W/ 23W spiral CFL lamp GU10 base.

Dimensions (in mm)

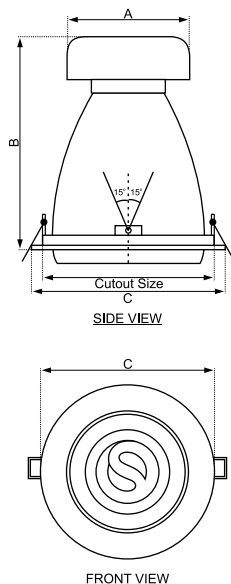


Table -1 : Dimensional Details

| Lamp Type | A | B | Cutout Size | D (φ) |
|-----------|----|-----|-------------|-------|
| 13W CFL | 60 | 115 | 86 | 95 |
| 23W CFL | 70 | 145 | 108 | 124 |

Tolerance: +/-2mm.

Specification

Housing

Made up of ABS white and reflector holding ring in ABS material in silver finish.

Reflector

Reflector made up of high purity pre-anodised specular aluminium sheet.

Electric gear

Wired with high frequency integral electronic ballast and push-fit type mains terminals for input supply connection.

Pre-fitted with replaceable, swivel, spiral CFL (6500K) lamp as standard and packed in attractive gift box.

Use single strand wire or multi-strand wire with thimble for supply connection. Lamp option also available in 2700K.

Mounting

Fixed into false ceiling with help of twin quick fix SS spring clips as per instruction manual provided. Use cut-out template from blister packaging. Suitable for false ceiling thickness upto 14mm.

Applications

Showrooms
Small offices
Shopping malls
Residential areas
Passages & corridors

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHOC02113663 | 1x13W CFL – 6K | 240 | 0.054 | GU10 | ≥0.90 |
| LHOC02123663 | 1x23W CFL – 6K | 240 | 0.095 | GU10 | ≥0.90 |

*For fixture with 2700K lamp option change last three digits of ordering code to 363.



Lonova-Square



Decorative compact, silver finish, recess, square type electronic downlighter with clear diffuser suitable for GU10 base 3W/ 5W miniature fluorescent lamp (MFL).

Dimensions (in mm)

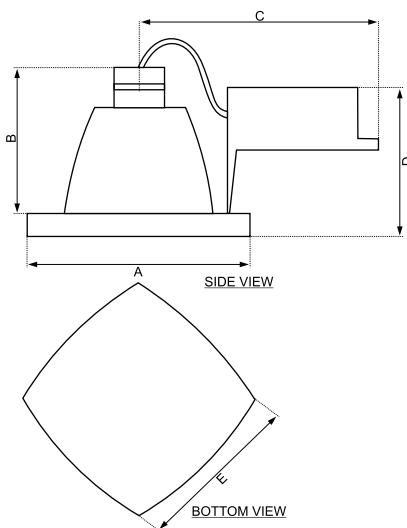


Table -1 : Dimensional Details

| Lamp Type | A | B | C | D | E | Cutout Size (φ) |
|-----------|-----|----|-----|----|----|-----------------|
| 3W MFL | 101 | 76 | 103 | 70 | 83 | 68 |
| 5W MFL | 120 | 83 | 105 | 70 | 96 | 78 |

Specification

Housing

Housing made up of white polycarbonate with mirror finish metalizing from inside. Premium finish square acrylic cover holding ring made up of ABS plastic with electroplating.

Diffuser

Clear acrylic optic cover for clean lamp compartment.

Lamp holders

GU 10 base white polycarbonate with electrical grade brass contacts.

Electric gear

Pre-wired with high frequency electronic ballast, upto terminal block. Pre-fitted with spiral miniature fluorescent lamp (6500K) as standard, ready to use and packed in attractive gift box.

Lamp option also available in 2700K.

Mounting

Fixed into false ceiling with help of 2nos. quick fix SS spring clips as per instruction manual provided. Use cut-out template from gift box packing. Suitable for false ceiling thickness upto 14mm.

Applications

Cell offices
Cyber cafes
Telephone kiosks
Small clean rooms
Stary night ceilings
Hospitals/ OPD rooms
Office corridors/ lobbies

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|---------------|-----------------------|---------------------|-------------|--------------|
| LHOC03103673 | 1x3W MFL - 6K | 240 | 0.043 | GU10 | ≥0.50 |
| LHOC03105673 | 1x5W MFL - 6K | 240 | 0.047 | GU10 | ≥0.50 |

*For fixture with 2700K lamp option change last three digits of ordering code to 373.



Lonova-Round



Decorative compact, silver finish, recess, round type electronic downlighter with clear diffuser suitable for GU10 base 7W / 9W / 11W miniature fluorescent lamp (MFL).

Dimensions (in mm)

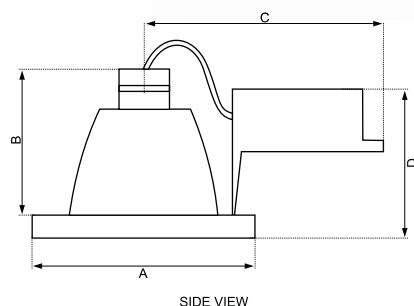


Table -1 : Dimensional Details

| Lamp Type | A | B | C | D | Cutout Size (φ) |
|-----------|-----|----|-----|----|-----------------|
| 7W MFL | 105 | 79 | 113 | 70 | 90 |
| 9W MFL | 130 | 81 | 125 | 70 | 113 |
| 11W MFL | 150 | 98 | 135 | 98 | 134 |

Specification

Housing

Housing made up of white polycarbonate with mirror finish metalizing from inside. Premium finish round acrylic cover holding ring made up of ABS plastic with electroplating.

Diffuser

Clear acrylic optic cover for clean lamp compartment.

Lamp holders

GU 10 base white polycarbonate with electrical grade brass contacts.

Electric gear

Pre-wired with high frequency electronic ballast, upto terminal block. Pre-fitted with spiral miniature fluorescent lamp (6500K) as standard, ready to use and packed in attractive gift box.

Lamp option also available in 2700K.

Mounting

Fixed into false ceiling with help of 2nos. quick fix SS spring clips as per instruction manual provided. Use cut-out template from gift box packing. Suitable for false ceiling thickness upto 14mm.

Applications

Cell offices
Cyber cafes
Telephone kiosks
Small clean rooms
Stary night ceilings
Hospitals/ OPD rooms
Office corridors/ lobbies

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHOC03107673 | 1x7W MFL - 6K | 240 | 0.057 | GU10 | ≥0.55 |
| LHOC03109673 | 1x9W MFL - 6K | 240 | 0.073 | GU10 | ≥0.55 |
| LHOC03111673 | 1x11W MFL - 6K | 240 | 0.095 | GU10 | ≥0.55 |

*For fixture with 2700K lamp option change last three digits of ordering code to 373.




Lonon-Surface (Square)



Decorative surface square type electronic downlighter with translucent diffuser suitable for flat profile 25W compact fluorescent lamp for diffused light.

Dimensions (in mm)

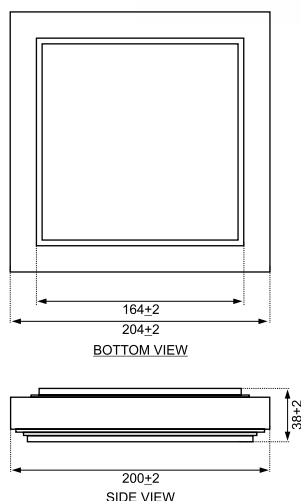

Specification

Housing

Housing made up of white polycarbonate.

Diffuser

Semi transparent, UV stabilized, polycarbonate patterned diffuser.

Lamp holders

White polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with integral high frequency electronic ballast, upto terminal block. Pre-fitted with flat base compact fluorescent lamp, ready to use and packed in gift box with 6500K colour temp. lamp as standard. Lamp option also available in 2700K.

Mounting

Fixed on wall/surface ceiling with help of 2nos. screws provided.

Applications

Apartments
Living rooms
Passage & corridors
Small cabins & offices
Restaurants & cafeterias
Dining & recreational areas



Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHDC70125670 | 1x25W CFL - 6K | 240 | 0.195 | 2GX15/56 | ≥0.50 |

*For fixture with 2700K lamp option change last three digits of ordering code to 370.




Lonon-Surface (Round)



Decorative surface round type electronic downlighter with translucent diffuser suitable for flat profile 25W compact fluorescent lamp for diffused light.

Dimensions (in mm)

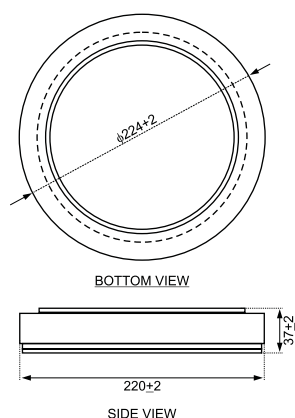

Specification

Housing

Housing made up of white polycarbonate.

Diffuser

Semi transparent, UV stabilized, polycarbonate patterned diffuser.

Lamp holders

White polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with integral high frequency electronic ballast, upto terminal block. Pre-fitted with flat base compact fluorescent lamp, ready to use and packed in gift box with 6500K colour temp. lamp as standard. Lamp option also available in 2700K.

Mounting

Fixed on wall/surface ceiling with help of 2nos. screws provided.

Applications

Apartments
Living rooms
Passage & corridors
Small cabins & offices
Restaurants & cafeterias
Dining & recreational areas



Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHDC71125670 | 1x25W CFL - 6K | 240 | 0.195 | 2GX15/56 | ≥0.50 |

*For fixture with 2700K lamp option change last three digits of ordering code to 370.



Lonon-Recess (Square)



Decorative recess square type electronic downlighter with translucent diffuser suitable for flat profile 9W/ 25W/ 30W / 45W compact fluorescent lamp for diffused light.

Dimensions (in mm)

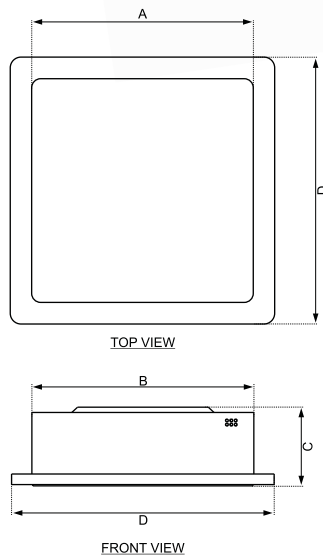


Table -1 : Dimensional Details

| Lamp Type | A | B | C | D | Cutout Size |
|-----------|-----|-----|----|-----|-------------|
| 9W CFL | 142 | 124 | 57 | 159 | 145x127 |
| 25W CFL | 188 | 166 | 69 | 200 | 191x169 |
| 30W CFL | 238 | 215 | 75 | 250 | 241x218 |
| 45W CFL | 281 | 281 | 65 | 315 | 285x285 |

Specification

Housing

Housing made up of white polycarbonate.

Diffuser

Semi transparent, UV stabilized, polycarbonate patterned diffuser.

Lamp holders

White polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with integral high frequency electronic ballast, upto terminal block. Pre-fitted with flat base compact fluorescent lamp, ready to use and packed in gift box with 6500K colour temp. lamp as standard. Lamp option also available in 2700K.

Mounting

Fixed into false ceiling with help of 2nos. quick fix SS spring clips as per instruction manual provided. Use cut-out template from gift box packing. Suitable for false ceiling thickness upto 14mm.

Applications

Apartments
Living rooms
Passage & corridors
Small cabins & offices
Restaurants & cafeterias
Dining & recreational areas



Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHOC68109670 | 1x9W CFL - 6K | 240 | 0.060 | 2GX15 | ≥0.59 |
| LHOC68125670 | 1x25W CFL - 6K | 240 | 0.180 | 2GX15/56 | ≥0.59 |
| LHOC68130670 | 1x30W CFL - 6K | 240 | 0.130 | 2GX15/88 | ≥0.95 |
| LHOC68145670 | 1x45W CFL - 6K | 240 | 0.180 | 2GX15/88 | ≥0.95 |

*For fixture with 2700K lamp option change last three digits of ordering code to 370.



Lonon-Recess (Round)



Decorative recess round type electronic downlighter with translucent diffuser suitable for flat profile 13W/ 32W compact fluorescent lamp for diffused light.

Dimensions (in mm)

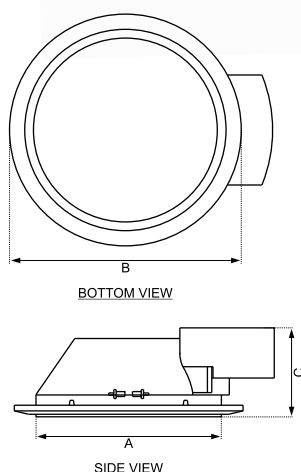


Table -1 : Dimensional Details

| Lamp Type | A (φ) | B (φ) | C | Cutout Size (φ) |
|-----------|-------|-------|----|-----------------|
| 13W CFL | 136 | 152 | 60 | 141 |
| 32W CFL | 186 | 204 | 81 | 191 |

Specification

Housing

Housing made up of white polycarbonate.

Diffuser

Semi transparent, UV stabilized, polycarbonate patterned diffuser.

Lamp holders

White polycarbonate/ ABS with electrical grade brass contacts.

Electric gear

Pre-wired with integral high frequency electronic ballast, upto terminal block. Pre-fitted with flat base compact fluorescent lamp, ready to use and packed in gift box with 6500K colour temp. lamp as standard. Lamp option also available in 2700K.

Mounting

Fixed into false ceiling with help of 2nos. quick fix SS spring clips as per instruction manual provided. Use cut-out template from gift box packing. Suitable for false ceiling thickness upto 14mm.

Applications

Apartments
Living rooms
Passage & corridors
Small cabins & offices
Restaurants & cafeterias
Dining & recreational areas

Technical Details

| Ordering Code* | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|----------------|----------------|-----------------------|---------------------|-------------|--------------|
| LHOC69113670 | 1x13W CFL - 6K | 240 | 0.090 | 2GX8/44 | ≥0.59 |
| LHOC69132670 | 1x32W CFL - 6K | 240 | 0.140 | 2GX12/60 | ≥0.95 |

*For fixture with 2700K lamp option change last three digits of ordering code to 370.




Ezee Deluxe



Decorative energy efficient premium lifestyle fixture with diffuser, electronic ballast suitable for single 36W compact fluorescent lamp (FP-L).

Dimensions (in mm)

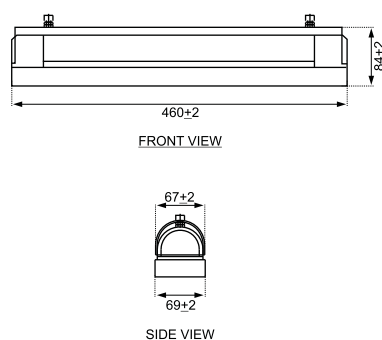

Specification

Housing

Elegant, unbreakable polycarbonate body.

Reflector

Reflector made up of high purity pre-anodised specular aluminium sheet.

Diffuser

Methacrylate diffuser for better glare control.

Electric gear

Wired with high frequency integral electronic ballast with clip-on type mains terminals for input supply connection.

Ready to use pre-fitted with 36W FP-L 6500K lamp, packed in attractive gift box.

Benefits

Hum free operation.

Low voltage pick-up (150V).

Hot re-lamping facility.

High power factor (≥ 0.95)

Total Harmonic Distortion (THD $\leq 33\%$)

Mounting

Fixed on wall/ ceiling with help of screws provided.

Applications

Residences
Study rooms
Office cabins
Recreation halls
Lounges & lobbies
Halls & reception areas

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|------------|-----------------------|---------------------|-------------|--------------|
| LHDC15136072 | 1x36W FP-L | 240 | 0.160 | 2G11 | ≥ 0.95 |




Ezee Quadra




Decorative energy efficient premium lifestyle fixture with electronic ballast suitable for four 18W/ 36W compact fluorescent lamps (FP-L).

Dimensions (in mm)

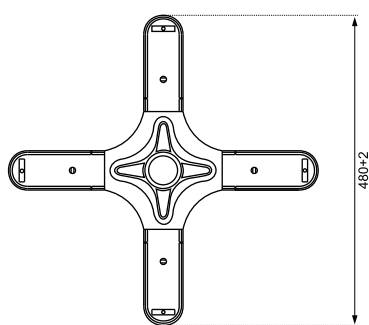

TOP VIEW



FRONT VIEW

Specification

Housing

Elegant unbreakable polycarbonate body.

Electric gear

Wired with high frequency intelligent electronic ballast to sense and operate 18/36W FP-L multiple lamps. Clip-on type mains terminals facilitates incoming supply connection.

Ready to use packed in attractive gift box.

Benefits

Hum free operation.

Low voltage pick-up (150V).

Hot re-lamping facility.

Independent lamp operation.

High power factor (≥ 0.95)

Total Harmonic Distortion (THD $\leq 33\%$)

Mounting

Fixed on wall/ ceiling with help of screws provided. Interesting lighting forms creation possible with combination of 18W/ 36W FP-L lamps.

Applications

Churches

Residences

Religious spaces

Corridors & lobbies

Small offices & shops



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|------------|-----------------------|---------------------|-------------|--------------|
| LHDC18436072 | 4x18W FP-L | 240 | 0.400 | 2G11 | ≥ 0.95 |
| | 4x36W FP-L | 240 | 0.630 | 2G11 | ≥ 0.95 |




City 1 New



Decorative wall light made up of polycarbonate suitable for incandescent lamp upto 60W or Retrofit CFL 15W (Spiral).

Dimensions (in mm)

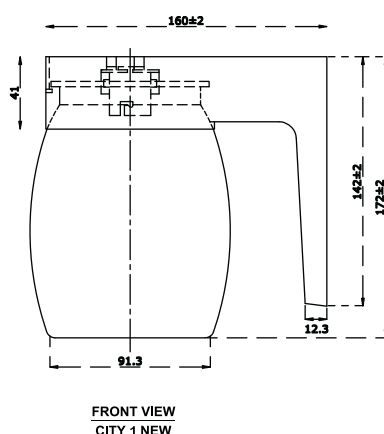

Specification

Housing

Made up of high grade polycarbonate

Refractor

Self screwed polycarbonate diffuser in opal finish for soothing light effect with enhanced UV stability & heat resistance the sqr high voltage spiral CFL & GLS Lamps.

Lamp Holder

Glass filled engineering plastic lamp holder with electrical grade copper contacts provided as standard, wired upto terminal block. Cable entry from rear wall-side for supply connection.

Mounting

Wall mounted by means of mounting bracket with lugs & screws provided through Ø10 mm hole.

Applications

Residences
Small offices
Showrooms
Restaurants
Hotel corridors & lobbies

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|----------------------------------|-----------------------|---------------------|-------------|--------------|
| LHDL02160099 | upto 1x15W CFL Retro (Spiral) | 240 | 0.075 | B22-d | ≥0.50 |

* Unbreakable in normal condition




City 2 New



Decorative wall light made up of poly carbonate suitable for incandescent lamp upto 60W or Retrofit CFL 15W (Spiral).

Dimensions (in mm)

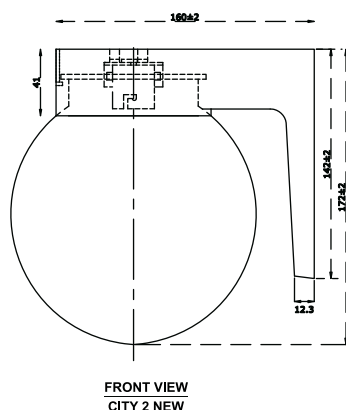

Specification

Housing

Made up of polycarbonate.

Refractor

Self screw milky white refractor made up of high impact resistance, UV resistance poly-carbonate for better light distribution.

Lamp holder

B22d Engg. plastic lamp holder with electrical grade brass contacts.

Electric gear

Pre wired with B22d lamp holder upto terminal block for supply connection. Cable entry from rear wall-side for supply connection.

Mounting

Wall mounted by bracket with lugs & with the help of screws provided.

Applications

Showrooms
Restaurants
Residential areas
Hotel corridors & lobbies

Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|----------------------------------|-----------------------|---------------------|-------------|--------------|
| LHDL03160099 | upto 1x15W CFL Retro (Spiral) | 240 | 0.075 | B22-d | ≥0.50 |

* Unbreakable in normal condition




Athena 2



Decorative Amphore shape post top lantern suitable for single retrofit CFL upto 26W.

Dimensions (in mm)

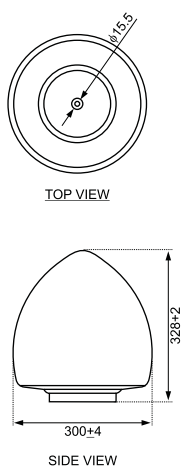

Specification

Housing

Made up of polycarbonate.

Refractor

Refractor made up of high impact resistance, UV resistance poly-carbonate prismatic finish for better light distribution.

Lamp holder

B22d Engg. plastic lamp holder with electrical grade brass contacts.

Electric gear

Pre wired with B22d lamp holder upto terminal block for supply connection.

Mounting

Suitable for post/ pole mounting of 60mm dia (max.) with the help of 2 screws provided.

Applications

Lawns
Gardens
Pathways
Court yards
Decorative porch lighting



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-------------------------|-----------------------|---------------------|-------------|--------------|
| LHDC12126099 | upto 1x26W retrofit CFL | 240 | 0.115 | B22d | ≥0.95 |

* Unbreakable in normal condition




Athena 3



Decorative Flare
shape post top
lantern suitable for
single retrofit CFL
upto 26W.

Dimensions (in mm)

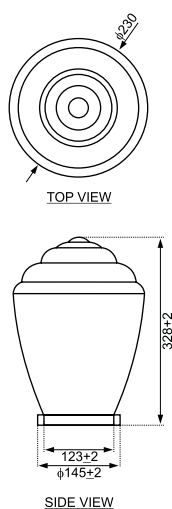

Specification

Housing

Made up of polycarbonate.

Refractor

Refractor made up of high impact resistance, UV resistance poly-carbonate frosted finish for better light distribution.

Lamp holder

B22d Engg. plastic lamp holder with electrical grade brass contacts.

Electric gear

Pre wired with B22d lamp holder upto terminal block for supply connection.

Mounting

Suitable for post/ pole mounting of 60mm dia (max.) with the help of 2 screws provided.

Applications


Lawns
Gardens
Pathways
Court yards
Decorative porch lighting



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-------------------------|-----------------------|---------------------|-------------|--------------|
| LHDC11126099 | upto 1x26W retrofit CFL | 240 | 0.115 | B22d | ≥0.95 |

* Unbreakable in normal condition




Athena 4



Decorative Amphore shape post top lantern suitable for single retrofit CFL upto 26W.

Dimensions (in mm)

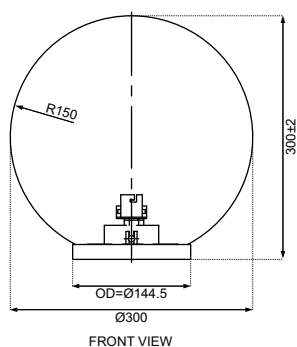

Specification

Housing

Made up of polycarbonate.

Refractor

Refractor made up of high impact resistance, UV resistance poly-carbonate in opal finish for soothing light effect.

Lamp holder

B22d Engg. plastic lamp holder with electrical grade brass contacts.

Electric gear

Pre wired with B22d lamp holder upto terminal block for supply connection.

Mounting

Suitable for post/ pole mounting of 60mm dia (max.) with the help of 2 screws provided

Applications

Lawns
Gardens
Pathways
Court yards
Decorative porch lighting



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-------------------------|-----------------------|---------------------|-------------|--------------|
| LHDC13126099 | upto 1x26W retrofit CFL | 240 | 0.115 | B22d | ≥0.95 |

* Unbreakable in normal condition




Athena 5



Decorative Flare
shape post top
lantern suitable for
single retrofit CFL
upto 26W.

Dimensions (in mm)

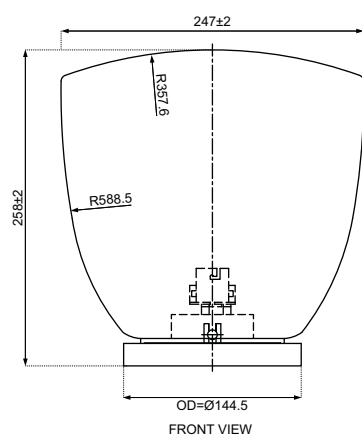

Specification

Housing

Made up of polycarbonate.

Refractor

Refractor made up of high impact resistance, UV resistance poly-carbonate in opal finish for soothing light effect.

Lamp holder

B22d Engg. plastic lamp holder with electrical grade brass contacts.

Electric gear

Pre wired with B22d lamp holder upto terminal block for supply connection.

Mounting

Suitable for post/ pole mounting of 60mm dia (max.) with the help of 2 screws provided

Applications

Lawns
Gardens
Pathways
Court yards
Decorative porch lighting



Technical Details

| Ordering Code | Lamp Type | Nominal Voltage (V) | Mains Current (A) | Lamp Socket | Power Factor |
|---------------|-------------------------|-----------------------|---------------------|-------------|--------------|
| LHDC14126099 | upto 1x26W retrofit CFL | 240 | 0.115 | B22d | ≥0.95 |

* Unbreakable in normal condition

